

# H373101 MILEY SCONCE

#### ASSEMBLY AND MOUNTING INSTRUCTIONS

#### GENERAL

- WARNING-DISCONNECT POWER BEFORE RELAMPING OR WIRING THE FIXTURE. TURN OFF THE ENTIRE ELECTRICAL CIRCUIT TO WHICH THE LIGHTING FIXTURE IS ATTACHED
- INSTALLATION AND MAINTENANCE OF THIS FIXTURE SHOULD BE COMPLETED BY A LICENSED ELECTRICAN
- FAILURE TO INSTALL FIXTURE CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH
- READ ALL INSTRUCTIONS BEFORE STARTING INSTALLATION.

- IF AN EXISTING FIXTURE IS BEING REPLACED, REMOVE IT AND NOTE TO WHICH WIRE IN THE OUTLET BOX THE ORIGINAL FIXTURE WAS ATTACHED.
- BEFORE DISCARDING THE CARTON DOUBLE CHECK THE PACKAGING TO MAKE SURE ALL PARTS HAVE BEEN FOUND.
- THIS FIXTURE WAS DESIGNED TO BE MOUNTED TO AN OCTAGON OUTLET BOX. THE BOX MUST BE SECURELY MOUNTED TO THE STRUCTURE OF THE BUILDING.

#### **INSTALLATION**

| STEP 1. | Pull the wires out from the outlet box and install mounting  |          | DEATH!  |
|---------|--|----------|---|
|         | plate onto the outlet box by using the (2) mounting screws.  | STEP 5.  | Carefully place connections back into the outlet box  |
| STEP 2. | Fasten bare ground wire to ground wire from the wall outlet box (usually green or copper color) or connect ground wire   | STEP 6.  | Place Back plate over the mounting plate and secure with set screws.  |
|         | to green screw on the mounting plate.  | STEP 7.  | Install the lamp(s). The fixture is rated for 6-watt type T   |
| STEP 3. | Connect the neutral (white) fixture wire coming from the fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire nut and tightly wrap the wire nut with electrical tape. | STEP 8.  | STEP 9. Tilt and rotate the glass shade so that the glass holder into glass shade. Drop metal cup and secure with the metal ring. |
| STEP 4. | Repeat the previous step with the hot (black wires). Make sure there are no exposed wires or strands that could cause a dangerous short circuit.   |          |   |
|         | FAILURE TO CONNECT THE APPROPRIATE WIRES CORRECTLY COULD RESULT IN SEROIUS INJURY OR   | STEP 10. | Restore power to the circuit at breaker or fuse-box.  |

### DIMMING

The fixture can be controlled by a wall dimming device. Only use triac/electronic dimmer. Make sure carton is marked for use with LED compact fluorescent-incandescent light source only. These can be

provided by your local electrical distributor, home center, or hardware


## CLEANING

Please clean with a soft, dry cloth ONLY! Do not use cleaning products.





# ASSEMBLYANDMOUNTINGDIAGRAM

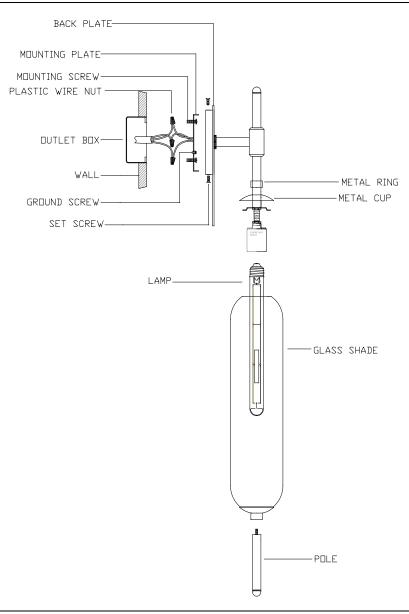

# WIRE NUT/TAPINGDIAGRAM

