


BATHROOM
Sento Floor-Mounted Tub Filler
G-6354-LM59N

GRAFF[®]

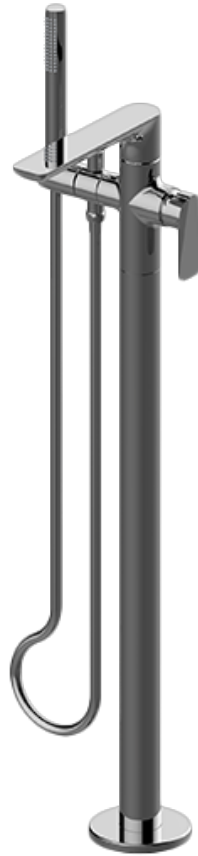



Information

- Floor-mount installation
- Aerated spout flow rate ~8 gpm @ 45 psi
- Handshower flow rate ≤ 1.5 max gpm
- 7-7/8" spout reach
- 30" - 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose (PVD finishes use 59" flex hose)
- Optional in-line pressure balancing valve
- ADA

G-6354-LM59N-T

SENTO Series

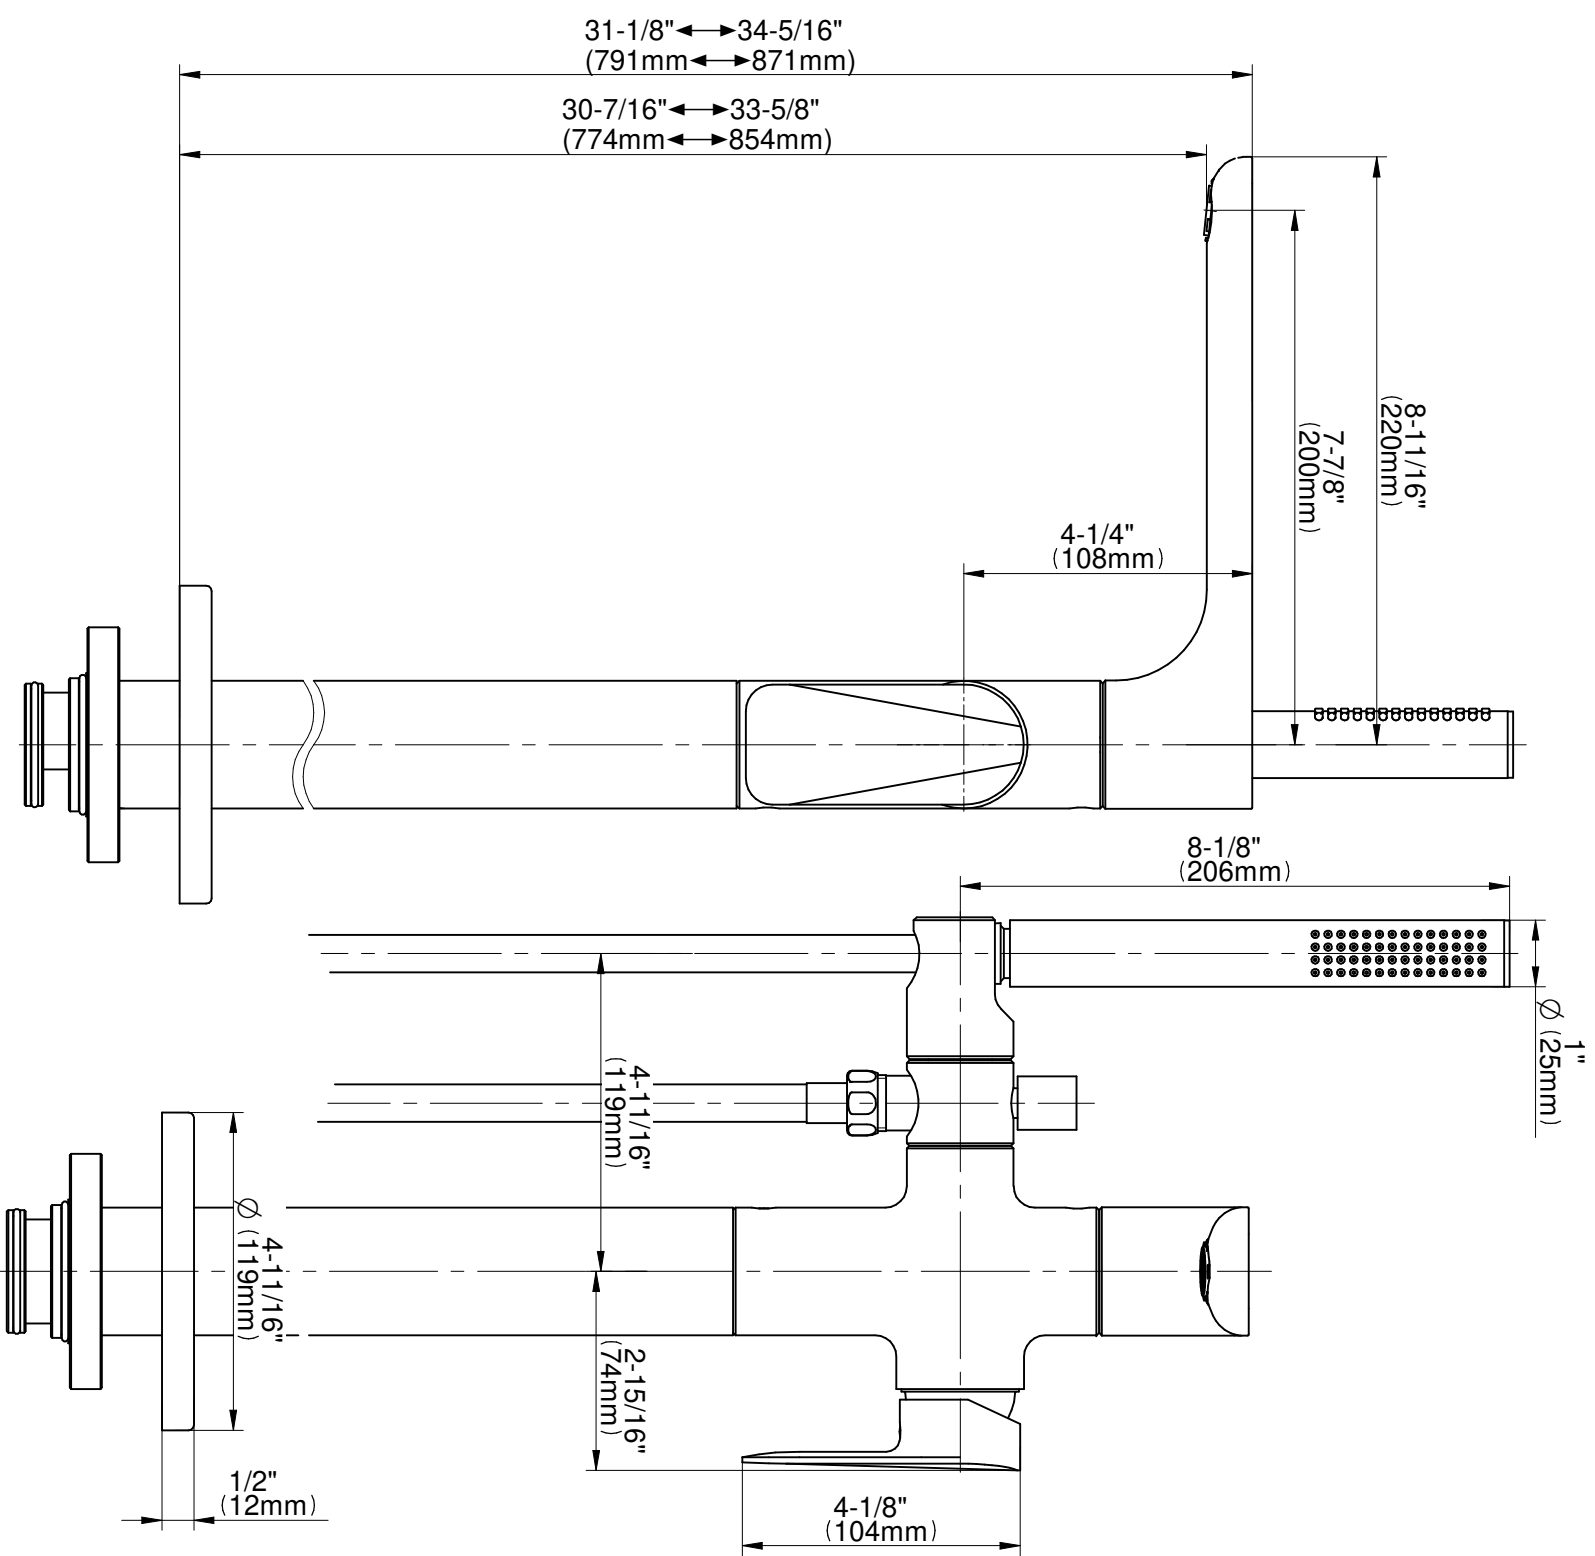


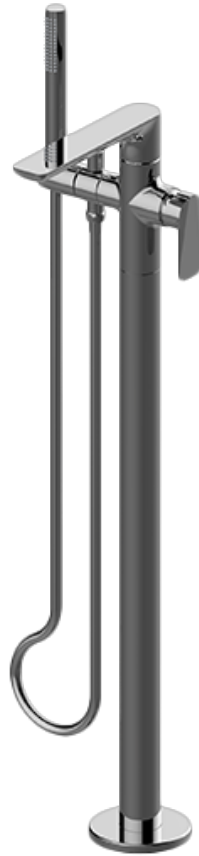

Information

- Floor-mount installation
- Aerated spout flow rate ~8 gpm @ 45 psi
- Handshower flow rate ≤ 1.5 max gpm
- 7-7/8" spout reach
- 30" - 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose (PVD finishes use 59" flex hose)
- Optional in-line pressure balancing valve
- ADA


Finishes

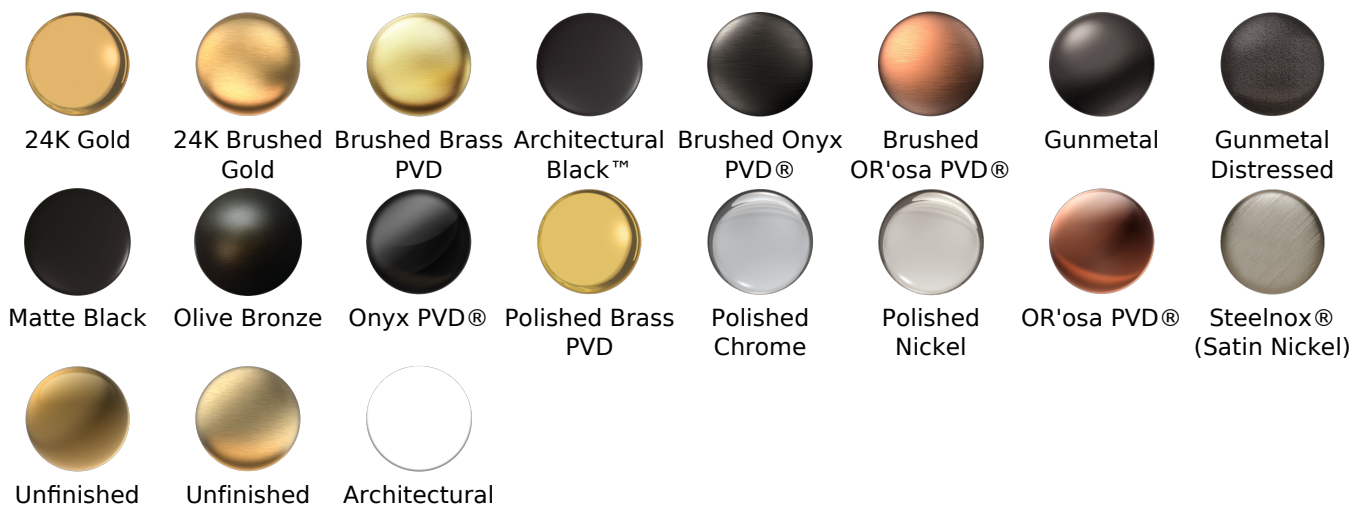

Brass Brushed Brass White



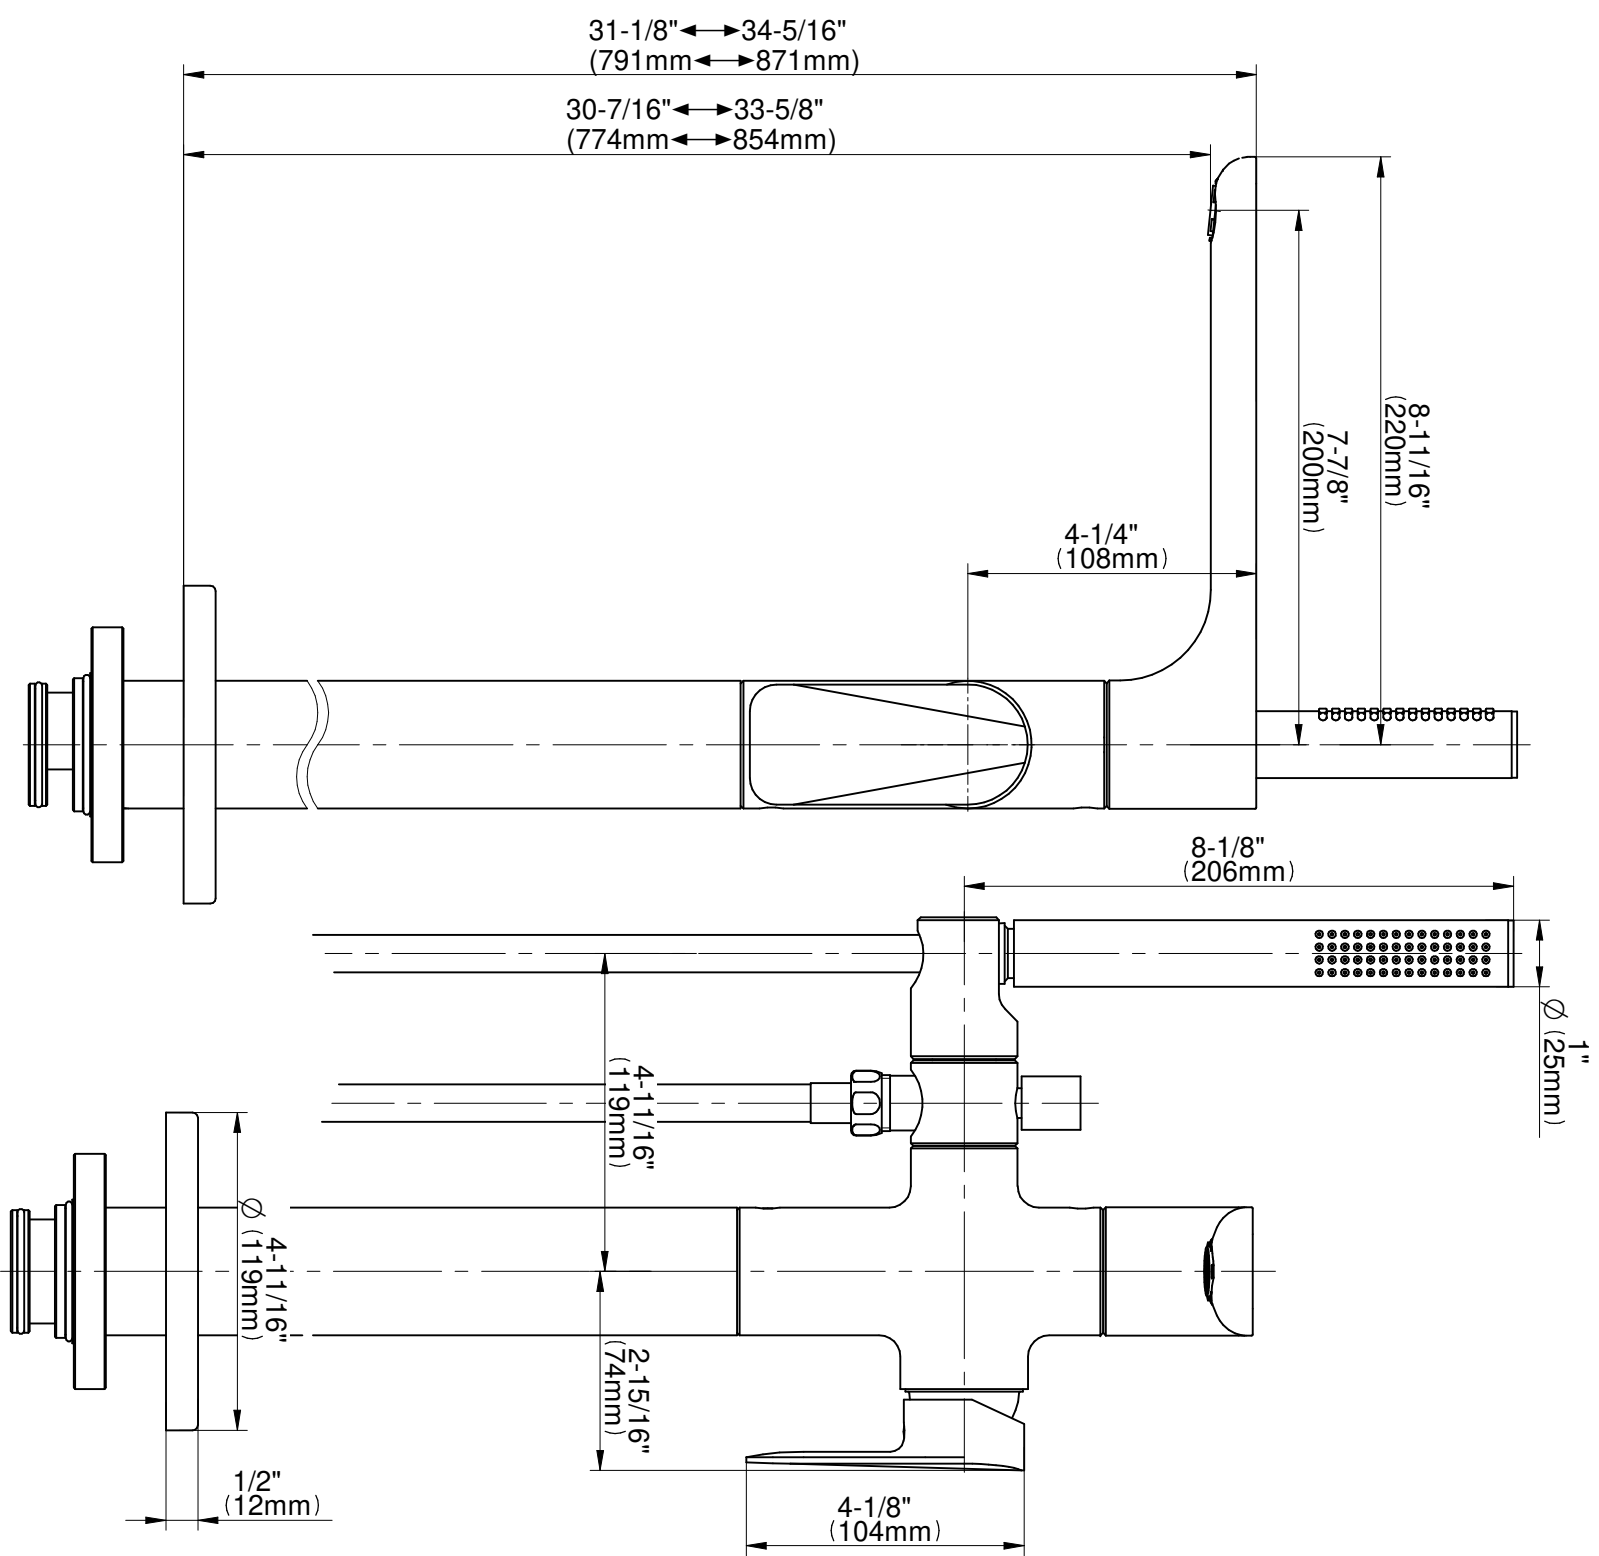
















G-6354-LM59N-T

SENTO Series





Finishes

							
24K Gold	24K Brushed Gold	Brushed Brass PVD	Architectural Black™	Brushed Onyx PVD®	Brushed OR'osa PVD®	Gunmetal	Gunmetal Distressed
							
Matte Black	Olive Bronze	Onyx PVD®	Polished Brass PVD	Polished Chrome	Polished Nickel	OR'osa PVD®	Steelnox® (Satin Nickel)
							
Unfinished Brass	Unfinished Brushed Brass	Architectural White					

G-1045
Spout Connection Rough



Product Features

- Mud guard displays minimum and maximum floor depth
- Rough can be installed in any orientation making it convenient to route pipes to the rough
- Trim can be rotated 360 degrees in any directions
- Averages 10 GPM with most trim

Warranty

- Limited lifetime warranty

For complete warranty information go to <http://www.graff-faucets.com/en/info/faqs>

