





S0181-OTS-2.0-TRM (CDS0181-3602-OTS-2.0-TRM)

Tub/Shower Trim

Installation Guide

Model Numbers	Specification
S0181-OTS-2.0-TRM Tub/Shower Trim	Tub/Shower Trim shall include metal lever handle, 8" non-diverter tub spout, 1 mode showerhead and 2.0 gpm (7.6 L/min) flow restrictor. Tub/Shower trim shall be
Warranty	made from metal construction, plated in standard polished chrome finish.
Limited Lifetime - to the original end purchaser in	Girone iman.


consumer/residential installations. 5 Years - for industrial/commercial installations.

Refer to www.symmons.com/warranty for complete warranty information.





Dimensions

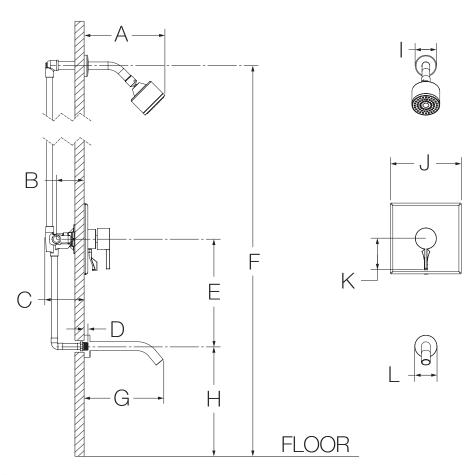


Measurements			
Α	8-1/2", 216 mm		
В	Rough-in		
	2-3/8" ± 1/2", 60 mm ± 13 mm		
С	3-1/2", 89 mm		
D	1/2", 13 mm		
Е	Ref. 12", 305 mm		
F	Ref. 77", 1956 mm		
G	8-3/8", 212 mm		
Н	Ref. 32", 813 mm		
ı	Ø 2-1/4", 57 mm		
J	7-1/2", 191 mm		
K	3-3/16", 81 mm		
L	Ø 2-3/8", 60 mm		

Notes:

- 1) All dimensions measured from nominal rough-in (see B as reference).
- 2) Dimensions subject to change without notice.

Parts Breakdown

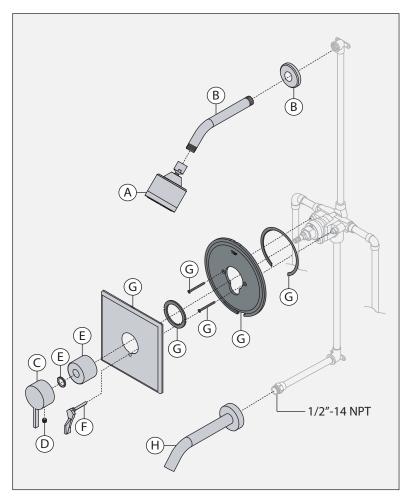

Replacement Parts				
Item	Description		Part Number	
Α	Showerhead		352SH-2.0	
В	Shower Arm & Flange		300	
C D	Handle Set Screw		RTS-021	
Е	Lock Nut & Dome Cover		T-19/20	
F	Diverter Handle		T-30	
G	Escutcheon Kit		RTS-002	
Н	Tub Spout		OTS	
Tools Required for Installation				
Allen Wrench: Handle (3mm)				
Phillips Head Screwdriver				
Plumber Tape				
Silicone		C		

Notes:

- 1) Apply a bead of silicone around the perimeter of all shower trim installed flush to the finished wall (less mounting plates and brackets). Leave opening on bottom of escutcheon for weep hole.
- 2) Apply plumber tape to all threaded connections.

For California Residents

WARNING: This product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.