


532HSB Hand Shower Unit **Specification Submittal**



Model Numbers	Specification
532HSB Hand Shower Unit	Hand shower unit includes in-line vacuum breaker, 30" slide bar with cradle for hand shower mounting, 60" flexible metal hose, 2 mode hand shower and
Modifications	standard 2.5 gpm (9.5 L/min) flow restrictor. Components made from metal and nonmetallic materials, plated in
□ -1.5 CG 1.5 gpm (5.7 L/min) flow restric	and the set of the test of
□ -2.0 2.0 gpm (7.6 L/min) flow restric	tor Warranty
Satin Nickel finish	
Note: Append appropriate -suffix to model number	
Compliance	5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete
-ASME A112.18.1/CSA B125.1	warranty information.

Dimensions

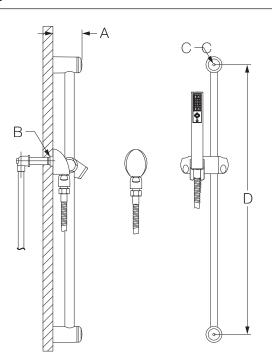

Measurements	
Α	3-1/8", 79 mm
	Male 1/2-14 NPT fitting must
В	be recessed 1/4" (6 mm)
	from finished wall
	(2x) Hole Size
С	Dry wall: Ø 3/16", 5 mm
	Stud: Ø 1/8", 3 mm
D	28-5/16", 719 mm

Note: Dimensions subject to change without notice.