

SLW-3522-1.5


Two Handle Widespread Lavatory Faucet





Model Numbers		Feature Highlights
□ SLW-3522-1.5	Two Handle Widespread Lavatory Faucet	 8" to 16" mount configuration Quarter turn ceramic cartridges 1/2" IPS inlet connections 5-3/4" height Lift rod and metal drain assembly Standard 1.5 gpm (5.7 L/min) flow rate Faucet shall be metal construction, plated in standard polished chrome finish
Finish Options/Modifications		Compliance
☐ -1.0 CG ☐ Delete Suffix 1.5	1.0 gpm (3.8 L/min) flow restrictor 2.2 gpm (8.3 L/min) flow restrictor	-ASME A112.18.1/CSA B125.1 -NSF/ANSI 61.9; NSF/ANSI 372
G -G	Grid drain	Warranty
□ -H2□ -H3	Alternative blade handle (Chrome and Satin Nickel finish only) Alternative cross handle (Chrome and Satin Nickel finish only)	Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete
□ -BBZ	Brushed Bronze finish	warranty information.
□ -МВ	Matte Black finish	
☐ -STN	Satin Nickel finish	
Note: Append appr	opriate -suffix to model number.	

Dimensions

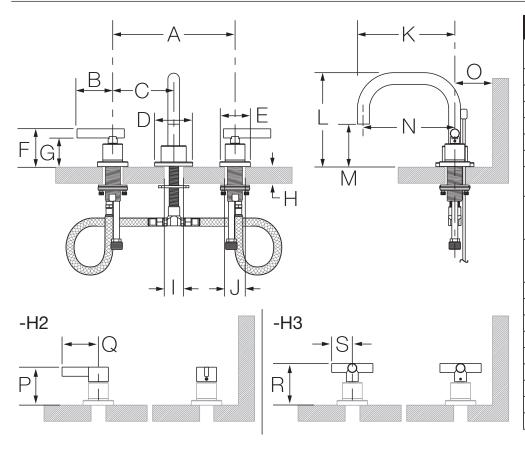

Measurements		
Α	Min. 8", 203 mm Max. 16", 406 mm	
В	2-3/8", 60 mm	
B C D E F	Min. 4", 102 mm	
D	2-1/2", 64 mm	
Е	2", 51 mm	
F	2-1/2", 64 mm	
G	1-7/8", 48 mm	
Н	Deck Thickness Ref. Max. 1-3/8", 35 mm	
I	Hole Size Min. Ø 1-1/2", 38 mm Max. Ø 1-5/8", 41 mm	
J	(2x) Hole size Min. Ø 1-1/8", 29 mm Max. Ø 1-1/2", 38 mm	
K	6-3/8", 162 mm	
┙	5-3/4", 146 mm	
М	2-5/8", 67 mm	
Ν	6", 152 mm	
0	Min. 1-1/2", 38 mm	
Р	2-1/2, 64 mm	
Q	2-3/8", 60 mm	
K	2-3/4", 70 mm	
S	1-3/8", 35 mm	

Note: Dimensions subject to change without notice.