

ELEGANCIA 6032

60" x 32" x 19"

With shapes and lines that take us back to the Victorian era, this collection transcends time, fitting right in with today's styles.



PRODUCT NO.

MODEL	TMU	TUB
Drop-in	BELDRBC0T-XX	BELDRBC0N-XX
Alcove - Left	BELDRBCLT-XX	BELDRBCLN-XX
Alcove - Right	BELDRBCRT-XX	BELDRBCRN-XX

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$
Jets	41
1 heated backrest	Included
MiaPlus® Control	Included
Geysair®	Included
AromaCloud® BAROMAC	\$
Illuzio Chromatherapy BCHRO6	\$

TUB Soaker	\$
AromaCloud® BAROMAC	\$
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control	Included with therapy

FEATURES

Installation type	Drop-in & Alcove (3 walls)		
No. of bathers	↓	Imp. gallons	37
US gallons	45	Integrated tile flange	Included

STANDARD COLOR

 White 01	 Biscuit 02	Included
--	--	----------

OPTIONS (UPCHARGE APPLICABLE)

COLOR

 Gray 05	\$
---	----

WASTE & OVERFLOW	D13 BOVERD13-XX	D14 BOVERD14-XX
Chrome 07	\$	\$
White 01, Biscuit 02	N/A	\$
Brushed Nickel 09, Polished Nickel 10	\$	\$
Unplated 00, Oil-rubbed Bronze 11	\$	N/A

SKIRT	MULTIFIT BSMUL-XX	SJ-1 BSJ1-XX
White 01, Biscuit 02	\$	\$
Gray 05	\$	\$

CONTROL (TMU only)

MiaMulti® BMIAM2-XX	\$
---------------------	----

 **Don't forget that an integrated tile flange is available at no extra cost.**
You must specify waste position.

TOTAL PRICE	\$
--------------------	----




ELEGANCIA 6032



Exclusive contour C12 for this size

INSTALLATION

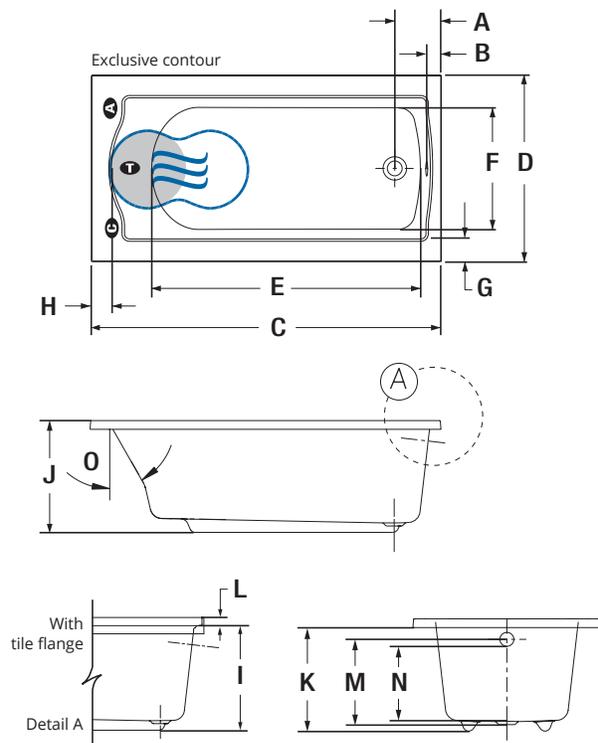

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center waste	8"
B	Outside edge to overflow	2 1/4"
C	Total length	60"
D	Total width	32"
E	Bathing well length	46 3/8"
F	Bathing well width	21"
G	Deck width	3 7/8"
H	Deck width at backrest end (widest point)	3 3/8"
I	Height from bottom of tub to top deck	19 1/4"
J	Height from bottom of tub to top deck	19 1/4"
K	Height from bottom of tub to bottom of lip	17 3/4"
L	Tile flange height	1"
M	Height from waste to center of overflow	14 1/2"
N	Maximum water level	12 7/8"
O	Slope of backrest	30°

- A** AromaCloud® position
- C** Control position when factory-installed (Mia® or DOT)
- T** Turbine position (TMU)
- Indicates heated backrest (TMU)
- ☄ Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of TUB or greater.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	- There is a height difference for the integrated tile flange (see drawing Detail A). - Available with or without integrated tile flange (specify right or left).

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	125 lbs
Turbine power	550 W
Air heater	600 W

WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.